

our service alone could make you our customer

“equipping the world for a better environment”

CRAM-A-LOT®

SOLID WASTE AND RECYCLING EQUIPMENT

SMALL COMPACT DESIGN SELF CONTAINED COMPACTORS

10 - 15 - 16 - 20 YARD



OPTIONAL HYDRAULIC LIFT TAIL GATE

Provides less handling and less cost for the haul. Can be dumped without removal from roll-off truck.



SC-T1-10 YARD


Only 148"l. - 96"W - 87"H
Designed for very limited space.
Consult hauler for special
hauling procedures.

115 VOLT POWER UNIT
AVAILABLE FOR ALL MODELS

**IDEALLY
SUITED FOR**
Fast Food Restaurants
Supermarkets
Strip Malls
Shopping Centers



CUSTOM ENGINEERED FOR SPECIFIC APPLICATIONS

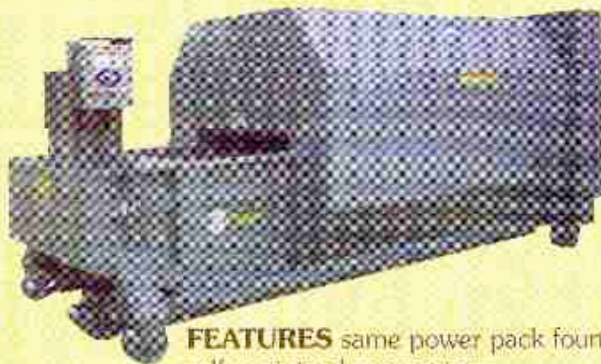

HOPPER OPTIONS include thru-the-wall breakaway style for haulers convenience and custom designed dog houses with magnetic interlock



Models available completely UL listed to U.S. and Canadian safety standards. Please call for details of models eligible to bear the UL mark.

FEATURES same power pack found on larger CRAM-A-LOT® models of self contained compactors.

Rental and Leasing Program Available

Parts and Labor are Warranted for One Year against materials and workmanship under normal usage.

J.V. MANUFACTURING, INC.

BALEERS • COMPACTORS • CONTAINERS • TRANSFER STATIONS

701 Highway 265-S P.O. Box 229 (501) 751-7320

Phone 1-800-678-7320 FAX (501) 751-7774

SPRINGDALE, ARKANSAS 72765-0229

www.cram-a-lot.com

DISTRIBUTED BY:



**American
Trash
Management**

**FOR SALES
AND SERVICE**

**Please Call:
800-488-7274**







CRAM-A-LOT[®] Self-contained Compactor Units can be custom designed and factory installed to suit your special applications.

SPECIFICATIONS	SC-T1-10	SC-T1-15	SC-T1-20	SC-T1-16-HTG
Charge Box Capacity	1 cu. yd.	1 cu. yd.	1 cu. yd.	1 cu. yd.
WASTEC Rating	0.75 cu. yd.	0.75 cu. yd.	0.75 cu. yd.	0.75 cu. yd.
Clear Top Opening	31"L x 48"W	31"L x 48"W	31"L x 48"W	31"L x 48"W
Cycle Time	39 seconds	39 seconds	39 seconds	39 seconds
Total Force, Normal	40,600 lbs.	40,600 lbs.	40,600 lbs.	40,600 lbs.
Maximum	48,800 lbs.	48,800 lbs.	48,600 lbs.	48,800 lbs.
Ram Face Pressure, Normal	36.8 psi	36.8 psi	36.8 psi	36.8 psi
Maximum	44.2 psi	44.2 psi	44.2 psi	44.2 psi
Ram Face Dimension, W x H	48"W x 23"H	48"W x 23"H	48"W x 23"H	48"W x 23"H
Ram Penetration	8" min.	8" min.	8" min.	6" min.
Electric Motor-3 Phase 208-230-480 VAC	10 hp	10 hp	10 hp	10 hp
Pump Capacity	10.5 gpm	10.5 gpm	10.5 gpm	10.5 gpm
Hydraulic Reservoir Capacity	22 gal.	22 gal.	22 gal.	22 gal.
Hydraulic Cylinder, Bore	(2) 4"	(2) 4"	(2) 4"	(2) 4"
Stroke	26"	26"	26"	26"
Rod	2"	2"	2"	2"
Operating Pressure, Normal	2000 psi	2000 psi	2000 psi	2000 psi
Maximum	2400 psi	2400 psi	2400 psi	2400 psi
Base Unit Weight	6500 lbs.	7000 lbs.	7500 lbs.	6700 lbs.
Construction, Container Sides	10 gauge steel	10 gauge steel	10 gauge steel	10 gauge steel
Container Floor	10 gauge steel	10 gauge steel	10 gauge steel	10 gauge steel
Understructure Rails	3/16 tubing	3/16 tubing	3/16 tubing	3/16 tubing
Breaker Bar	6" x 6" x 1" angle	6" x 6" x 1" angle	6" x 6" x 1" angle	6" x 6" x 1" angle
Compactor Floor	1/2" plate	1/2" plate	1/2" plate	1/2" plate
Ram Top	3/16" plate	3/16" plate	3/16" plate	3/16" plate
Ram Sides	3/16" plate	3/16" plate	3/16" plate	3/16" plate
Ram Bottom	1/2" AR plate	1/2" AR plate	1/2" AR plate	1/2" AR plate
Nominal Container Capacity	10 cu. yd.	15 cu. yd.	20 cu. yd.	16 cu. yd.

In order to provide the most currently engineered and designed equipment, we reserve the right to change specifications without prior notice. This brochure is intended to provide information only and should not be used in an arbitrary manner to judge equipment for any particular purpose. Performance may vary with application. Products must be installed and operated according to required standards, codes, regulations and safety procedures. Only the standard written warranty issued by J.V. Manufacturing, Inc. applies.

DIMENSIONS	A	B
SC-T1-10	12'-3"	6'-7 11/16"
SC-T1-15	15'-7"	9'-11 11/16"
SC-T1-20	18'-11"	13'-3 7/8"

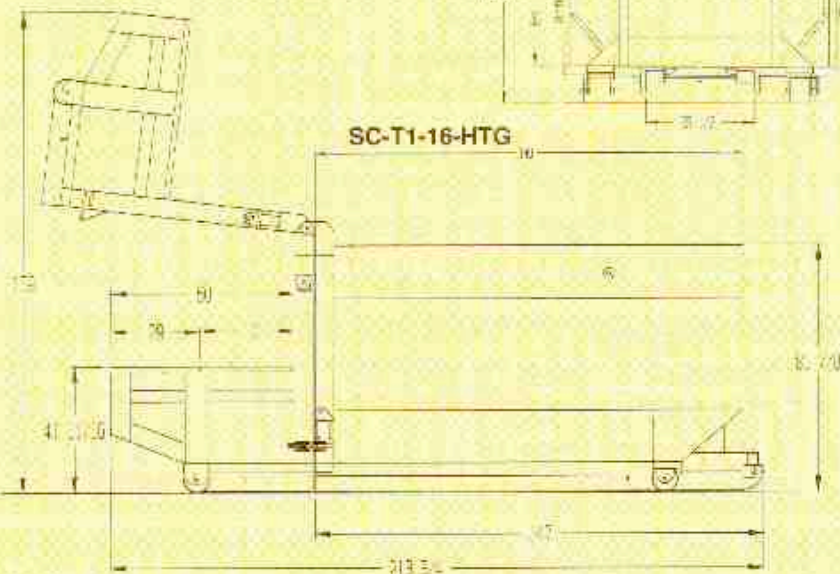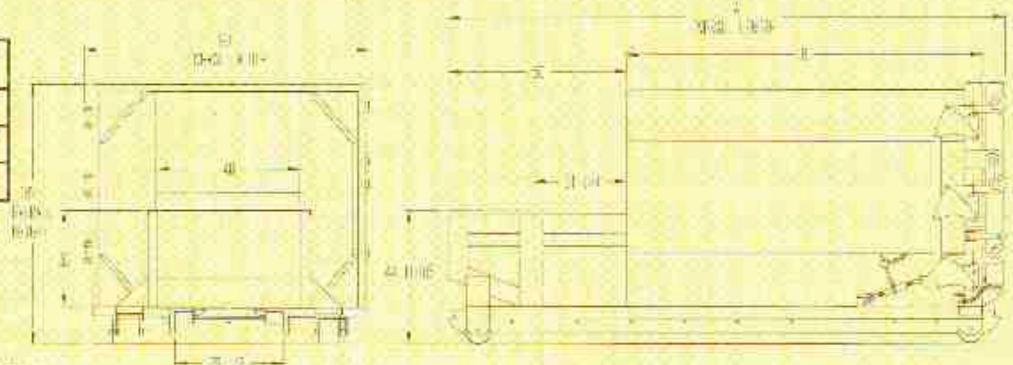

This equipment conforms to all current ANSI Z 245.2 safety standards.

ELECTRICAL FEATURES

- > Only Major Brand Electrical Components Used
- > Weather-tight Electrical Enclosure
- > No Electrical Connection to Compactor Unit

Manufacturing a full line of CRAM-A-LOT[®] Solid Waste Equipment